

Narda EMF drive test solution

Narda EMF Area Monitors are equipped with exclusive, state-of-the-art sensors having high sensitivity, accuracy and reliability.

Their robust, uncluttered construction is perfect for long-term outdoor installation.

The AMB-8059 handles applications from a few Hertz through to long wave and on up to high frequency microwave radiation using a selection of interchangeable probes for electric and magnetic fields.

- › Interchangeable probes from 10 Hz to 40 GHz for low frequency & high frequency application
- › Multi-band probes for telecommunications monitoring
- › Electromagnetic fields level maps in a minimum of time
- › On board GPS synchronized with the field strength
- › Common GPS Format for easy exchange
- › Easy installation and removal on vehicle roof thanks to the magnetic mounting kit
- › Capability of live results on a laptop through a fiber optic cable
- › No influence on the measurement values due a copper cable
- › Up to 18 hours of continuous data logging
- › Up to 30 working days with primary lithium battery
- › Optional Rechargeable Battery Kit for interruption-free EMF monitoring

ITU-T K.113
Compliant



Area monitor AMB-8059/00
with Car Mounting Kit option

Fast and Continuous Monitoring

The Car Mounting Kit is an option of the area monitor AMB-8059/00. It allows for monitoring wide geographical areas while driving. EMF data are correlated with GPS coordinates to identify areas requiring more detailed measurements. Direct readings in the car, on a laptop, are possible by means of the fiber optic link.

Vehicle and station are galvanically isolated.

The magnetic base mount allows for safe, quick installation on any car roof (non-magnetic hardtops excluded).

A simple software shows, in real time, values of each band and according to the ITU-T, directive K.113, it is possible to monitor data acquisition and set a luminous and acoustic alarm that is activated according to vehicle's speed.

Google Earth

The maximum potential is however obtained from the use of Google Earth. In addition to saving data in the GPX format, the user can choose to have a KML file, perfectly compatible with the Google viewer.


The data of the probes are divided into levels according to the number of bands and each band is, in turn, divided into sub-levels according to the ITU-T directive K.113 and to the limits set by the user.

On the map, in addition to the route, the field values are indicated with different colors according to their criticality.

For each data collected it is also possible to display additional characteristics such as temperature, humidity, battery voltage, speed, acceleration, date and time.




The area monitor placed on a car roof

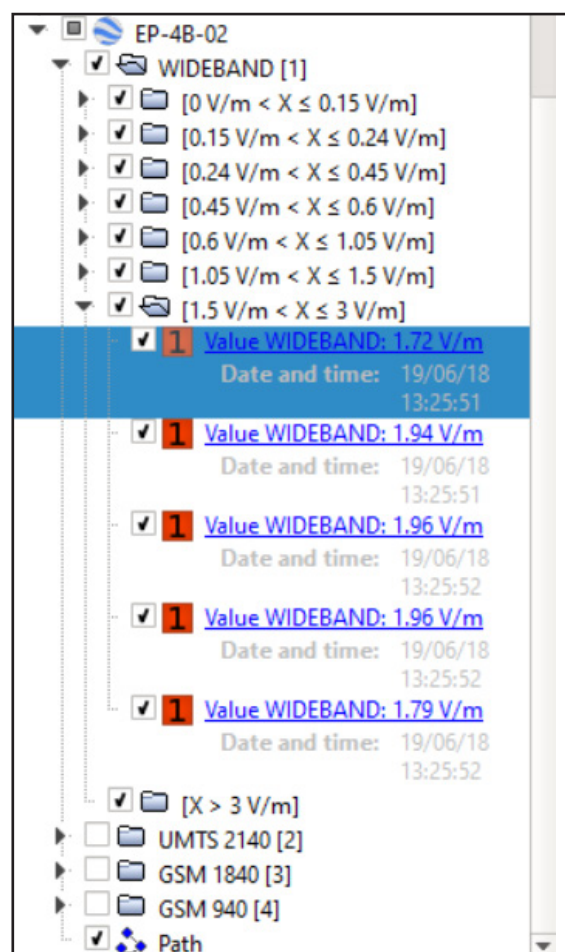


Example of levels obtained with a quad band probe model EP-4B-02 with limit set to 3 V/m

Data related to each single point

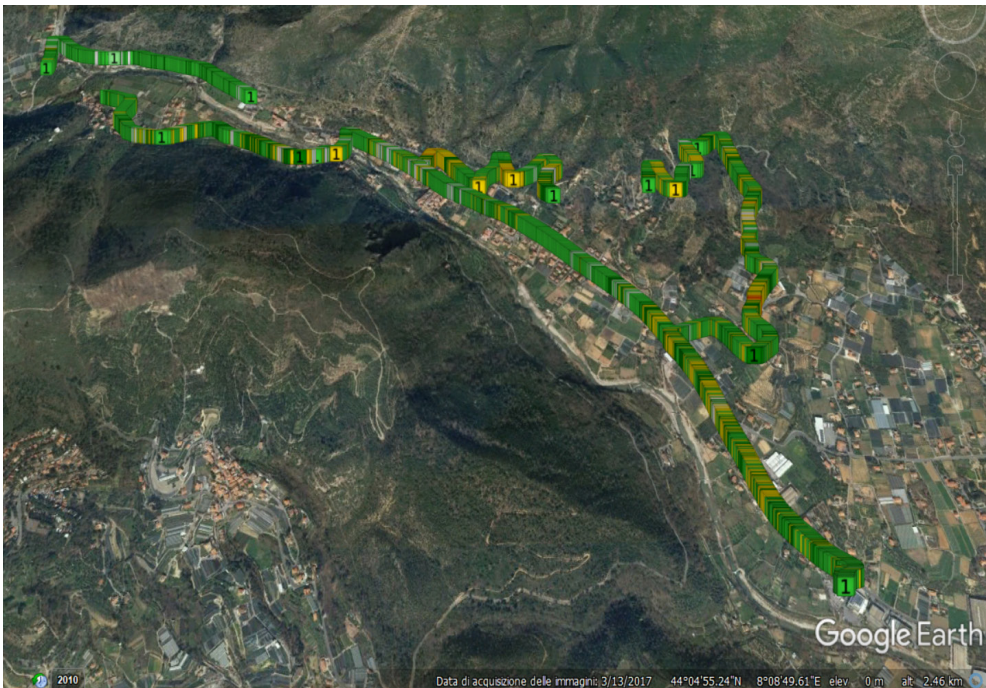

Viewing of the whole path with all aquired points

Path displayed in street view mode

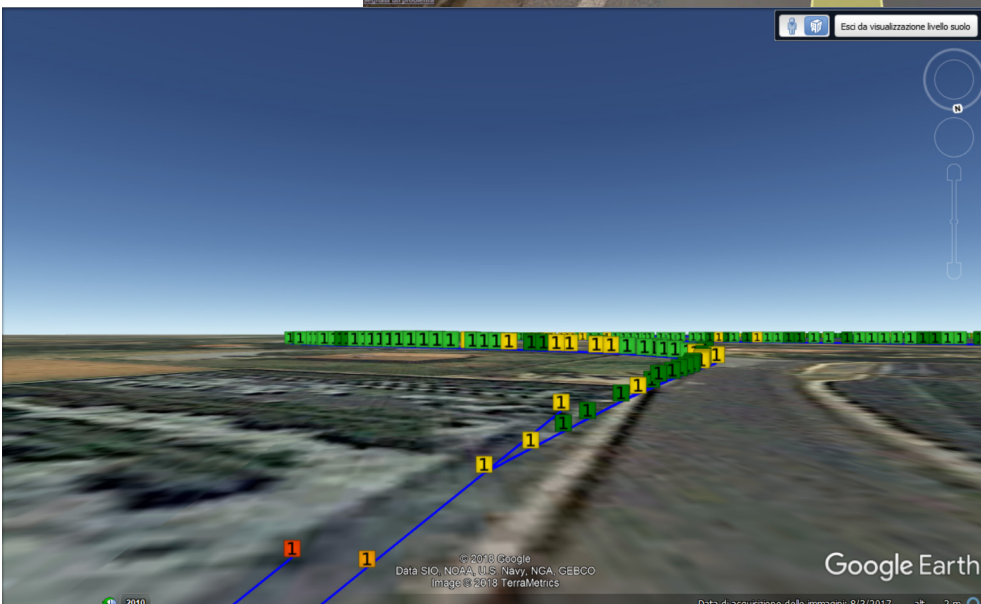

Path displayed at ground level with all acquisition points

SPECIFICATIONS

AMB-8059 Car Mounting Kit option*

General Specifications	
Field probes	Interchangeable
Interfaces	USB through optical fiber, Wi-Fi**
Other alarms	Protective case opening, internal overheat, internal humidity, low battery, probe malfunction, field over limit
Internal battery	Non rechargeable primary battery, lithium SAFT LSH20 3.6 V, 13 A/h, commercially available
Vehicle speed	0 to 60 km/h
Sample rate	300 ms (GPS coordinates synchronized with EMF)
Operating time	Over 200 h (max current consumption 40 mA with Wi-Fi OFF)
Max data storage in drive test application	18 hours
Installation	Magnetic mounting kit for the vehicle
Compliance	2014/30, 2014/35, CEI 211-6, CEI 211-7, ITU-T K.83, ITU-T K.113
Ambient temperature	-20 to +55 °C
Dimensions	301 x 241 x 750 mm (complete of AMB-8059/00)
Weight	Less than 3 kg
Environmental protection	IP55
Country of origin	Italy

* The Car Mounting Kit is a separate option of the AMB-8059/00 and has to be purchased apart

**Future implementation on the Narda EMF GPS Logger software.

EP-1B-01

Electric Field Probe*	
Frequency range	0.1 MHz to 3 GHz
Measurement range	0.2 to 200 V/m (dynamic range > 60 dB)
Measurement resolution	0.01 V/m
Sensitivity	0,2 V/m
Overload	600 V/m
Flatness @ 20 V/m	1 to 200 MHz ± 0.8 dB 0.15 MHz to 3 GHz ± 1.5 dB
Linearity	± 0.5 dB (0.5 to 100 V/m)
Anisotropy @ 6 V/m	± 0.8 dB @ 50 MHz (typical 0.6 dB)
H-Field rejection	> 20 dB
Temperature error	0,1 dB/°C
A/D conversion	On board
Calibration factors	On board E ² prom
Temperature sensor	On board
Dimensions	450 mm length, 55 mm Ø
Weight	180 g

(*) All probes include on board A/D conversion, calibration factors on E²PROM, and temperature sensor

EP-1B-03

Electric Field Probe*	
Frequency range	0.1 MHz to 7 GHz
Measurement range	0.2 V/m to 200 V/m (dynamic range > 60 dB)
Measurement resolution	0.01 V/m
Overload	600 V/m
Sensitivity	0,2 V/m
Flatness @ 20 V/m	3 MHz to 200 MHz: ± 0.8 dB 0.15 MHz to 3 GHz: ± 1.5 dB 0.1 MHz to 6 GHz: ± 2 dB
Linearity	± 0.5 dB (0.5 to 100 V/m)
Anisotropy @ 6 V/m	± 0.8 dB @ 50 MHz (typical 0.6 dB)
H-Field rejection	> 20 dB
Temperature error	0,1 dB/°C
A/D conversion	On board
Calibration factors	On board E ² prom
Temperature sensor	On board
Dimensions	450 mm length, 55 mm Ø
Size and weight	180 g

EP-1B-05

Electric Field Probe*	
Frequency range	0,3 MHz – 18 GHz
Reading range	0,5 – 800 V/m
Overload	1200 V/m
Dynamic range	> 64 dB
Linearity	± 0.5 dB (± 0.3 typical) (1.2 V/m to 200 V/m) @ 200 MHz
Resolution	0,01 V/m
Sensitivity	0,5 V/m
Flatness @ 6 V/m	1 MHz to 1 GHz ± 1.5 dB 1 GHz to 12 GHz ± 3.0 dB 12 GHz to 18 GHz ± 4.0 dB
Anisotropy @ 200 MHz	± 0.8 dB (typical 0,5 dB @ 930 and 1800 MHz)
Rejection of magnetic field	> 20 dB
Temperature error	0,02 dB/°C
A/D conversion	On board
Calibration factors	On board E2prom
Temperature sensor	On board
Dimensions	Length 450mm, diameter 55mm
Weight	180g

(*) All probes include on board A/D conversion, calibration factors on E²PROM, and temperature sensor

EP-1B-06

Electric Field Probe*	
Frequency range	0.3 MHz to 40 GHz
Measurement range	0.5 V/m to 800 V/m (dynamic range > 64 dB)
Measurement resolution	0.01 V/m
Overload	1200 V/m
Flatness @ 6 V/m	1 MHz to 1 GHz ± 1.5 dB 1 GHz to 12 GHz ± 3.0 dB 12 GHz to 23 GHz ± 4.0 dB 23 GHz to 40 GHz ± 5.0 dB
Linearity	± 0.5 dB (± 0.3 typical) (1.2 V/m to 200 V/m) @ 200 MHz
Anisotropy @ 200 MHz	± 0.8 dB (typical 0.5 dB @ 930 and 1800 MHz)
H field rejection	> 20 dB
Size and weight	450 mm x 55 mm Ø, 180 g

EP-1B-08

Electric Field Probe*	
Frequency range	0.1 MHz to 8 GHz
Measurement range	0.2 V/m to 200 V/m (dynamic range > 60 dB)
Measurement resolution	0.01 V/m
Overload	600 V/m
Flatness @ 20 V/m	3 MHz to 200 MHz: ± 0.8 dB 0.15 MHz to 6 GHz: ± 2 dB 0.1 MHz to 8 GHz: ± 3 dB
Linearity	± 0.5 dB (0.5 to 100 V/m) @ 50 MHz
Anisotropy @ 6 V/m	± 0.8 dB @ 50 MHz (typical 0.6 dB)
H-Field rejection	> 20 dB
Size and weight	450 mm x 55 mm Ø, 180 g

HP-1B-01

Magnetic Field Probe*	
Frequency range	10 Hz to 5 kHz
Measurement range and overload	50 nT to 200 μ T (dynamic range >72 dB); overload: > 1 mT
Measurement resolution	1 nT
Flatness	40 Hz to 1 kHz, 1 dB (typical 0.6 dB)
Linearity	± 0.5 dB (200 nT to 100 μ T)
Anisotropy	0.3 dB @ 50 Hz, 3 μ T
E field rejection	> 20 dB
Size and weight	83 mm x 53 mm Ø, 110 g

(*) All probes include on board A/D conversion, calibration factors on E²PROM, and temperature sensor

EP-4B-01 Quad-Band Electric Field Probe*

Frequency range	Wideband 0.1MHz to 3 GHz	EGSM 900 925 to 960 MHz	EGSM 1800 1805 to 1880 MHz	UMTS 2110 to 2170 MHz
Meas. range	0.2 to 200 V/m	0.03 to 30 V/m	0.03 to 30 V/m	0.03 to 30 V/m
Meas. resolution	0.01 V/m			
CW damage level	300 V/m			
Flatness @ 6 V/m	1 to 200 MHz ± 0.8 dB 0.15 MHz to 3 GHz ± 1.5 dB	925 to 960 MHz +0.5/-2.5 dB	1805 to 1880 MHz +0.5/-2.5 dB	2110 to 2170 MHz +0.5/-2.5 dB
Linearity	± 0.5 dB (0.5 to 100 V/m)	± 0.5 dB (0.06 to 20 V/m)	± 0.5 dB (0.06 to 20 V/m)	± 0.5 dB (0.06 to 20 V/m)
Anisotropy	± 0.8 dB @ 50 MHz, 3 V/m (typical 0.6 dB)	± 0.8 dB@ 942.5 MHz, 3 V/m (typical 0.6 dB)	± 0.8 dB@ 1842.5 MHz, 3 V/m (typical 0.6 dB)	± 0.8 dB@ 2140 MHz, 3 V/m (typical 0.6 dB)
Out of band attenuation	Not applicable	Rejection to 1842 MHz(GSM): 25 dB to 2140 MHz(UMTS): 25 dB	Rejection to 942 MHz(GSM): 15 dB to 2140 MHz(UMTS): 13 dB	Rejection to 942 MHz(GSM): 17dB to 1842 MHz(GSM): 10 dB
Centre frequency drift	Not applicable	40 °C – 50 °C = ± 100kHz -20 °C – 40 °C = ± 100 kHz/°C		
H field rejection	> 20 dB			
Size and weight	450 mm x 55 mm Ø, 210 g			

EP-4B-02 Quad-Band Electric Field Probe*

Frequency range	Wideband 0.1 MHz to 7 GHz	EGSM 900 925 to 960 MHz	EGSM 1800 1805 to 1880 MHz	UMTS 2110 to 2170 MHz
Meas. range	0.2 to 200 V/m	0.03 to 30 V/m	0.03 to 30 V/m	0.03 to 30 V/m
Meas. resolution	0.01 V/m			
Dynamic range	>60 dB			
Flatness @ 6 V/m	3 to 200 MHz ± 1.5 dB 0.15 MHz to 3 GHz ± 2 dB 0.1 MHz to 7 GHz ± 3 dB	925 to 960 MHz +0.5 / -2.5 dB	1805 to 1880 MHz +0.5 / -2.5 dB	2110 to 2170 MHz +0.5 / -2.5 dB
Linearity	± 0.5 dB (0.5 to 100 V/m)	± 0.5 dB (0.1 to 20 V/m)	± 0.5 dB (0.1 to 20 V/m)	± 0.5 dB (0.1 to 20 V/m)
Anisotropy	± 0.8 dB@ 50 MHz, 3 V/m (typical 0.6 dB)	± 0.8 dB@ 942.5 MHz, 3 V/m (typical 0.6 dB)	± 0.8 dB@ 1842.5 MHz, 3 V/m (typical 0.6 dB)	± 0.8 dB@ 2140 MHz, 3 V/m (typical 0.6 dB)
Out of band attenuation	Not applicable	Rejection to 1842 MHz(GSM): 25 dB to 2140 MHz(UMTS): 25 dB	Rejection to 942 MHz(GSM): 15 dB to 2140 MHz(UMTS): 13 dB	Rejection to 942 MHz(GSM): 17dB to 1842 MHz(GSM): 10 dB
Centre frequency drift	Not applicable	40 °C – 60 °C = ± 100 kHz -20 °C – 40 °C = - 100 kHz / °C		
H field rejection	> 20 dB			
Size and weight	450 mm x 55 mm Ø, 210 g			

(*) All probes include on board A/D conversion, calibration factors on E²PROM, and temperature sensor

ORDERING INFORMATION

AMB-8059 Car Mounting Kit	
Area Monitor station powered by internal primary Li-Ion battery	AMB-8059/00
8059/CMK - Car Mounting Kit for drive test solution	650.800.300
Included in delivery with the 8059/CMK	
<ul style="list-style-type: none"> • Soft carrying case for Magnetic plate • Soft carrying case for Area monitor • Mounting accessories • PC Software EMF GPS logger 	
Probes	
Electric Field Probe 0.1 MHz to 3 GHz; 0.2 to 200 V/m	EP-1B-01
Electric Field Probe 0.1 MHz to 7 GHz; 0.2 to 200 V/m	EP-1B-03
Electric Field Probe 0.3 MHz to 18 GHz; 0.5 to 800 V/m	EP-1B-05
Electric Field Probe 0.3 MHz to 40 GHz; 0.5 to 800 V/m	EP-1B-06
Electric Field Probe 0.1 MHz to 8 GHz; 0.2 to 200 V/m	EP-1B-08
Magnetic Field Probe 10 Hz to 5 kHz; 50 nT to 200 µT	HP-1B-01
Quad-Band Electric Field Probe 0.1 MHz to 3 GHz; 0.2 to 200 V/m 925 to 960 MHz / 1805 to 1880 MHz / 2110 to 2170 MHz, 0.03 to 30 V/m	EP-4B-01
Quad-Band Electric Field Probe 0.1 MHz to 7 GHz; 0.2 to 200 V/m 925 to 960 MHz / 1805 to 1880 MHz / 2110 to 2170 MHz, 0.03 to 30 V/m	EP-4B-02
Optional accessories	
Lithium-Ion rechargeable battery kit	650.000.342
Cable, FO Duplex RP-02, 10 m	650.000.196
Cable, FO Duplex RP-02, 20 m	650.000.257
Cable, FO Duplex RP-02, 40 m	650.000.275

Narda Safety Test Solutions GmbH
Sandwiesenstrasse 7
72793 Pfullingen, Germany
Phone: +49 7121 9732-0
info.narda-de@narda-sts.com
www.narda-sts.com

Narda Safety Test Solutions
North America Representative Office
435 Moreland Road
Hauppauge, NY11788, USA
Phone: +1 631 231-1700
info@narda-sts.com

Narda Safety Test Solutions Srl
Via Benesse 29/B
17035 Cisano sul Neva (SV) - Italy
Phone: +39 0182 58641
nardait.support@narda-sts.it
www.narda-sts.it

Narda Safety Test Solutions GmbH
Beijing Representative Office
Xiyuan Hotel, No.1 Sanlihe Road, Haidian
100044 Beijing, China
Phone: +86 10 6830 5870
support@narda-sts.cn

© Names and Logo are registered trademarks of Narda Safety Test Solutions GmbH – Trade names are trademarks of the owners.