

FLIR ETS320™

Thermal Imaging Solution for Electronics Testing



The FLIR ETS320 is an affordable solution for reducing test times and improving product design for electronic board and device evaluation. Whether the goal is R&D or product testing, heat can be an important indicator of how a system is functioning. The ETS320 helps engineers and test technicians collect accurate, reliable data in seconds and analyze it quickly.

Reduce Test Times

The FLIR ETS320 takes the guesswork out of thermal testing, for fast discovery of hot spots and potential points of failure.

- Sensitive enough to detect temperature shifts smaller than 0.06°C
- Wide temperature range, from -20°C to 250°C, for quantifying heat generation and thermal dissipation
- Measures small components down to 170 µm per pixel spot size

Improve Product Design

The FLIR ETS320 promotes design improvements and shortens product development time by detecting design flaws that materialize as heat.

- 320 x 240 IR sensor offers 76,800 points of non-contact temperature measurement
- True 45° field of view for broad initial scans to identify potential problems
- Measurement accuracy of ±3°C promotes quality assurance and factory acceptance of PCBs


Designed for Laboratory Work

The ETS320 is designed for hands-free laboratory testing, with simplified features that allow users to focus on their work instead of on the camera controls.


- Pole mount included for fast and easy setup
- Crisp 3" LCD display provides immediate thermal feedback
- FLIR Tools+ software for instant analysis, including Time vs. Temperature measurement

Key Features:


- 320 x 240 IR resolution (76,800 pixels)
- Vibrant 3" LCD display
- 45° field of view
- ±3% measurement accuracy
- Records standard radiometric JPEGs
- FLIR Tools+ software provided

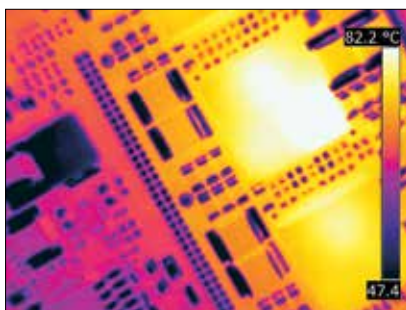

Measure small components down to 170 µm per pixel spot size

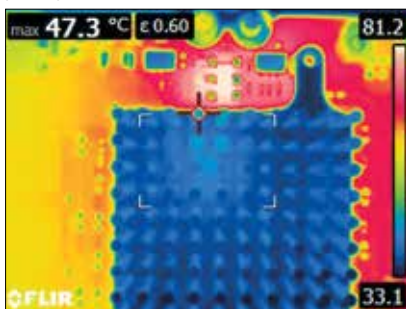

Determine where to add or remove thermal management devices

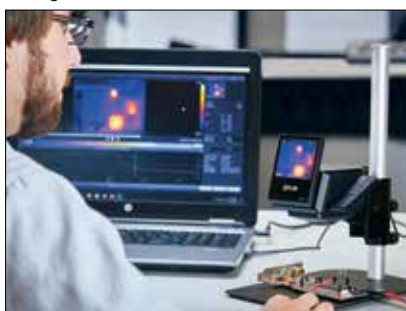

Connect over USB a computer to analyze data in FLIR Tools+

Specifications

System Overview		ETS320	
IR Resolution	320 x 240 (76,800 pixels)		
Detector Type	Uncooled microbolometer		
Spectral Range	7.5 - 13.0 μ m		
Thermal Sensitivity/NETD	< 0.06°C		
Field of View (FOV)	45° x 34°		
Fixed Focus Distance	70 mm \pm 10 mm		
F-number	1.5		
Spot Size @ Min. Focus	170 μ m		
Image Frequency	9 Hz		
Measurement and Analysis			
Object Temperature Range	-20°C to 250°C		
Accuracy	\pm 3°C or \pm 3% of reading for ambient temperature 10°C to 35°C		
Spotmeter	Center spot		
Area	Box with max/min		
Emissivity Correction	Variable from 0.1 to 1.0		
Emissivity Table	Table of pre-defined materials		
Reflected Apparent Temperature Correction	Automatic, based on input of reflected temperature		
Storage of Images			
Image File Formats	Standard radiometric JPEG, 14-bit measurement data included		
Video Streaming			
Radiometric IR Video Streaming	Full dynamic to PC (FLIR Tools/Tools+) using USB		
Non-Radiometric IR Video Streaming	Uncompressed colorized video using USB		
Data Communication Interfaces			
Interfaces	USB Micro: data transfer to and from PC and Mac devices		
Power System			
Battery Type	Li-ion battery, charged in camera		
Battery Operating Time	Approx. 4 hours at 25°C (77°F) ambient temperature and typical use		
Charging Time	2.5 hrs to 90% capacity		
Additional Data			
Display	3 in, 320 x 240 pixel color LCD		
Operating Temperature Range	10°C to 40°C		
Storage Temperature Range	-40°C to 70°C		
Directives and Regulations	<ul style="list-style-type: none"> • Battery Directive 2006/66/EC • EMI/EMC Directive 2014/30/EU • WEEE Directive 2012/19/EC • RoHS2 Directive 2011/65/EC • FCC 47 CFR Part 15 Class B • REACH Regulation EC 1907/2006 		
Encapsulation, Shock, Vibration	• IP 40 (IEC 60529)		
Camera Weight, Incl. Battery	575 g		
Camera Size (L x W x H)	22 x 15 x 30 cm		
FLIR ETS320 Includes:			
List of Contents	Camera, mount, stand, power supply, USB cable, FLIR Tools+ software		

For the most up-to-date specifications, go to www.flir.com

SWEDEN

Instruments Division
FLIR Systems AB
Antennvägen 6
187 66 Täby
Tel. : +46 (0)8 753 25 00
E-mail : flir@flir.com

Benelux

Sales Administration
FLIR Commercial Systems
Luxemburgstraat 2
2321 Meer
Belgium
Tel.: +32 (0) 3665 5100

FLIR Germany

Frankfurt
Tel. +49 (0)69 95 00 900

FLIR France

Torcy
Tel. +33 (0)1 60 37 01 00

FLIR Italy

Milan
Tel. +39 (0)2 99 45 10 01

FLIR UK

West Malling
Tel. +44 (0)1732 220 011

FLIR Spain

Madrid
Tel. +34 91 573 48 27

FLIR Russia

Moscow
Tel. + 7 495 669 70 72

FLIR Middle East

Dubai
Tel. +971 4 299 6898

FLIR Turkey

Istanbul
Tel. +90 (212) 317 90 55

FLIR Africa

Johannesburg
Tel. +27 11 300 5622

www.flir.com
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. 16-1715_EMEA